
SBD-A050




- DIGITAL TIMER에 의해 토출시간 설정 용이
- 최소 0.01sec 부터 시간설정이 가능하므로 소량 토출도 가능
- 액체흐름 방지용 VACUUM 기능 탑재
- 소형SIZE, 저가격
- CASE를 사출로 제작하여 제품 무게를 경량화
- 외부 POWER SUPPLY 를 두어 경량화 및 불안전한 전원의 안정성 보장
- 토출체크스위치(Shot)를 표준으로 내장



전원	DC220V±10% 50/60Hz
전력소비량	30W (MAX)
제어방법	전자 공압 제어방식
공기압 조정범위	0~0.9MPa(0~9.0kgf/㎠)
권장 공급 공기압	0.7MPa이상 (MAX 0.99Mpa)
토출시간 범위	0.01~ 9.99 sec
동작 모드	Time(정량토출)/Steady(연속토출)
버큠 기능	기본 내장
입출력 신호	입력: 전압 접점 또는 무전압 접점
	출력: 무전압 접점
작동 능력	600 cycle/min
작동 온도	+5℃~+40℃
외형 크기	(W)180 X (D)118 X (H)62 (body)
무게	1.8kg below

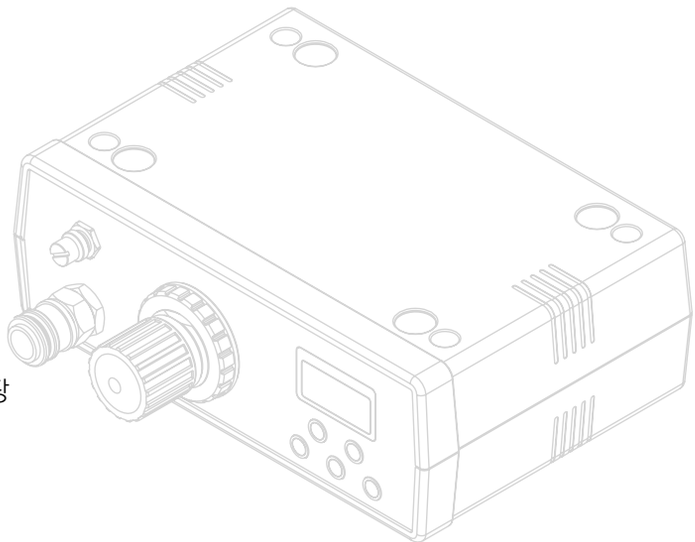

SBD-A050

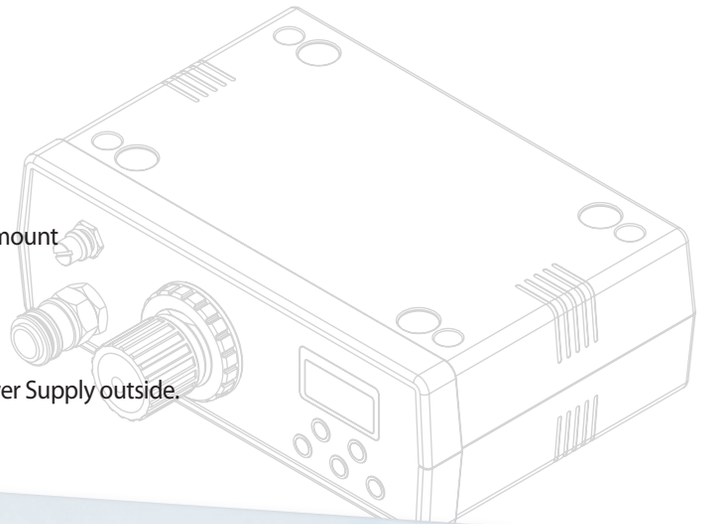

- Easy to set the discharging time by digital timer
- Minimum 0.01sec of time setting and, so possible to discharge small amount
- Vacuum function can be loaded for prevention of liquid flow
- Small size, low price
- Lighting product's weight by making case with injection
- Lighting product's weight and assuring safety of Power by placing Power Supply outside.
- Embedding standard Discharging Check Switch(Shot)



Power	DC220V±10% 50/60Hz
Power consumption	30W (MAX)
Control method	Electronic Pneumatic control system
Pneumatic pressure adjustment range	0~0.9MPa(0~9.0kgf/㎠)
The recommended supply pneumatic pressure	More than 0.7MPa (Max 0.99MPa)
Discharging time range	0.01~ 9.99 sec
Operation mode	Time(constant discharge)/ Steady(continuous discharge)
Vacuum function	Basically Embedded
Input/output signal	Input: contact voltage or zero voltage
	Output: Zero voltage
Operational capability	600 cycle/min
Operating temperature	+5℃~+40℃
Size	(W)180 X (D)118 X (H)62 (body)
Weight	1.8kg below

